ERGOPIXEL

Assembly Video:

MODEL : GD-0003

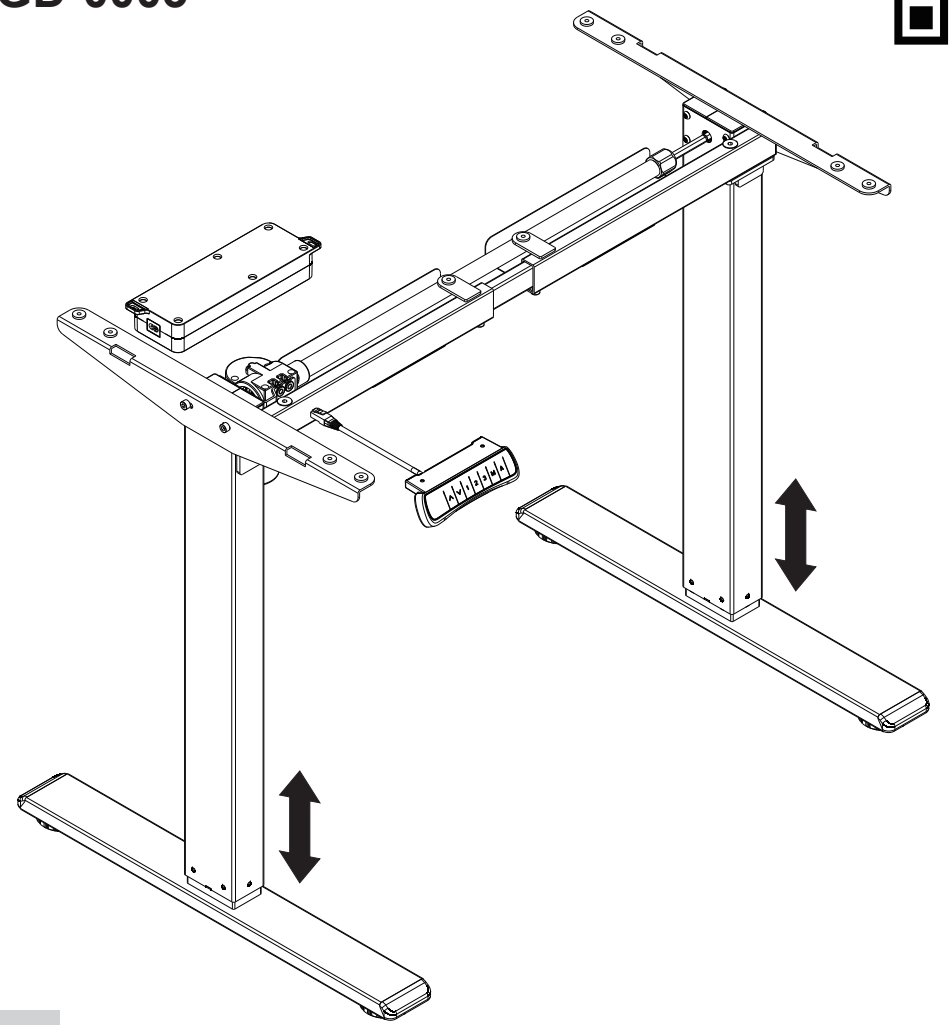

Technical data

Column Number	2
Maximum Load	70KG
Max Speed	25mm/s
Input Voltage	100-240V
Lowest Position	710mm
Highest Position	1210mm
Desktop Size	1000-1600mm 500-800mm
Duty Cycle	Continuous operation for 2 mins at most after pause for 18 mins
Applicable Temperature	0~40°C

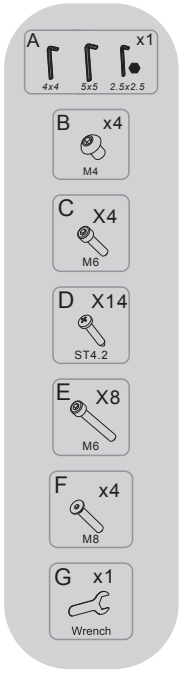

ERGOPIXEL

Part list

No.	Part	Qty	No.	Part	Qty	No.	Part	Qty
①	 Pedestal	2	②	 Left Column	1	③	 Right Column	1
④	Supporting beam	1	⑤	Transmission rod	1	⑥	 Side Bracket	2
⑦	 Baffle	1	⑧	 Control Box	2	⑨	 Power cable	1
⑩	 Cable tie	4	⑪	 Handset	1	⑫	 Handle Screw	2

Installation instruction

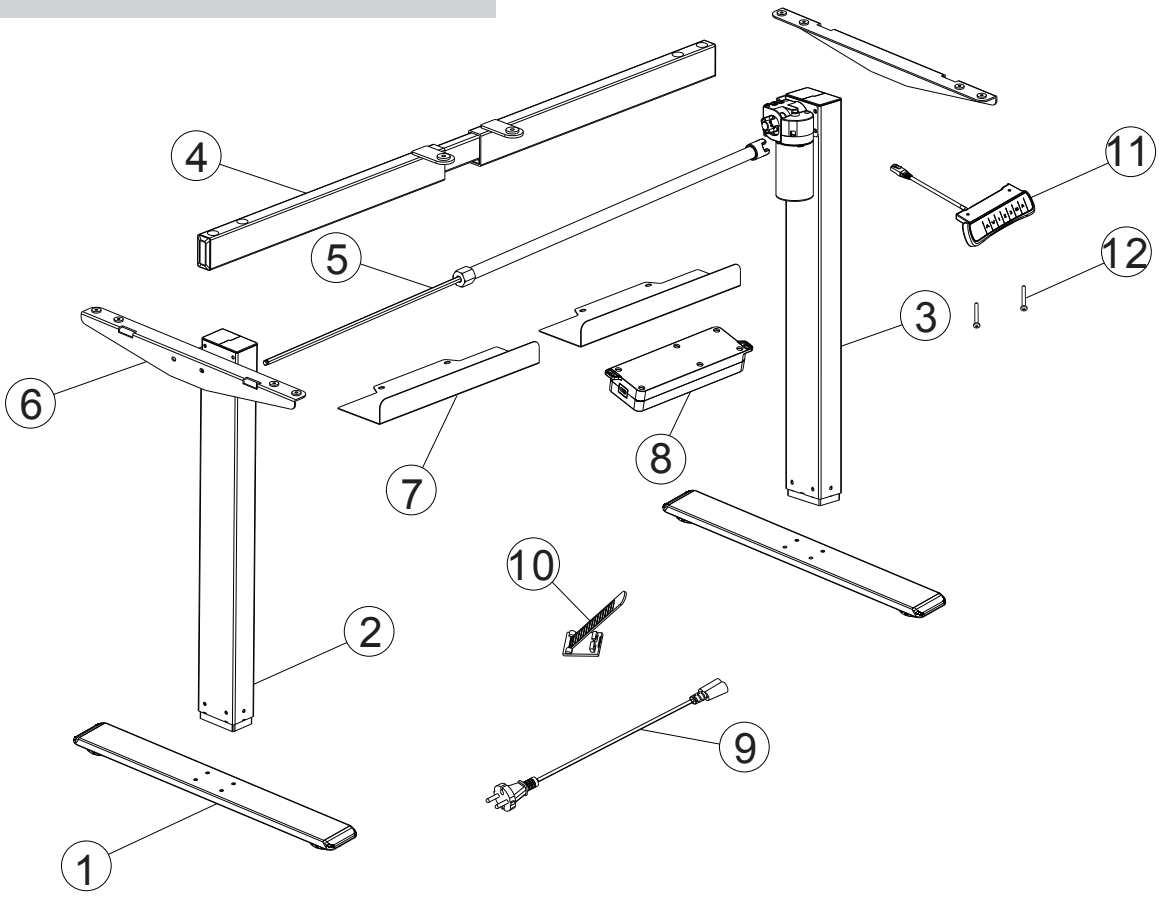

ERGOPIXEL

1 Install (1), (2) & (3) together, using the 5 x 5 allen key (A) to tighten the screws (E).

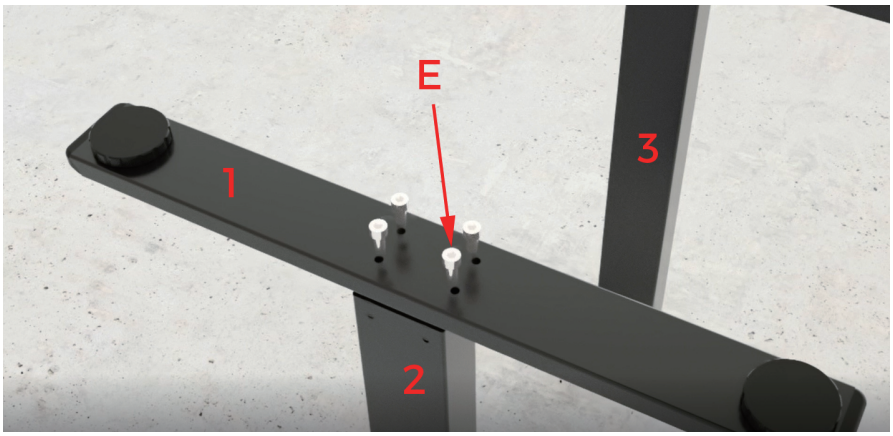

2 Unscrew the 4 screws on supporting beam (4) with the 4x4 allen key (A).

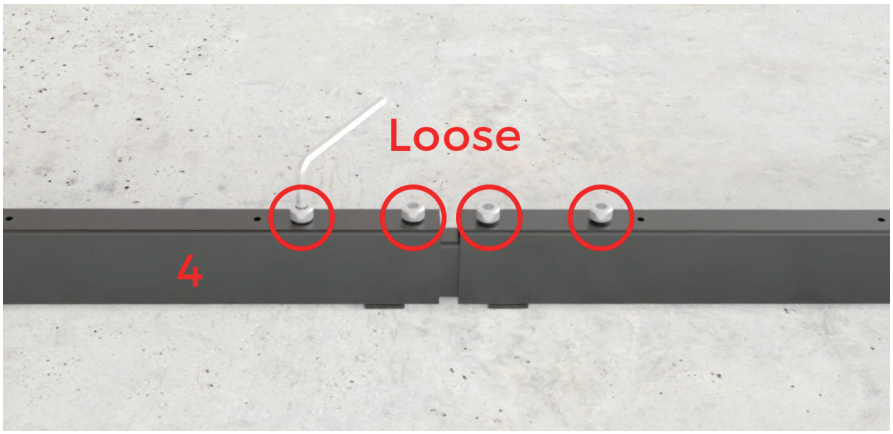

3 Pull out the supporting beam (4).

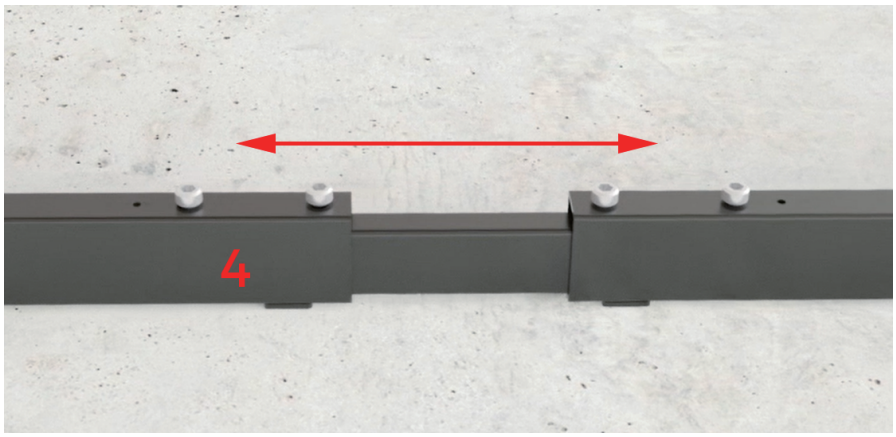

ERGOPIXEL

4

Install supporting beam (4) on the columns (2)(3).
Tighten the screws (F) with the 5x5 allen key (A).

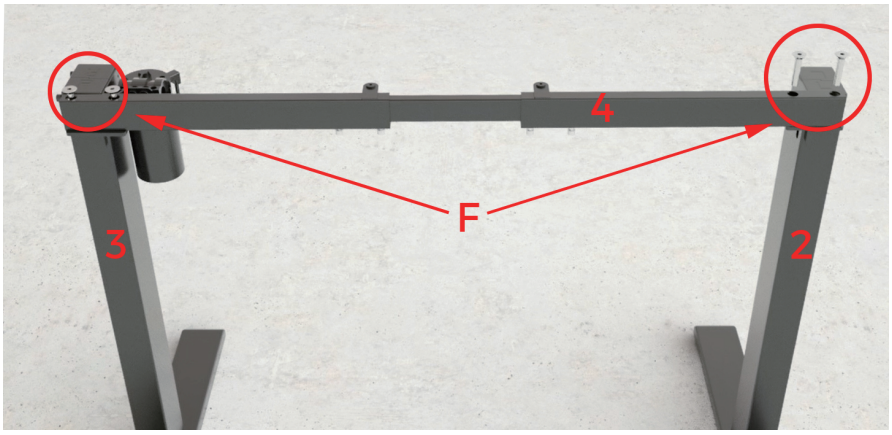

5

Loose the screws on transmission rod (5) and insert to column (2).

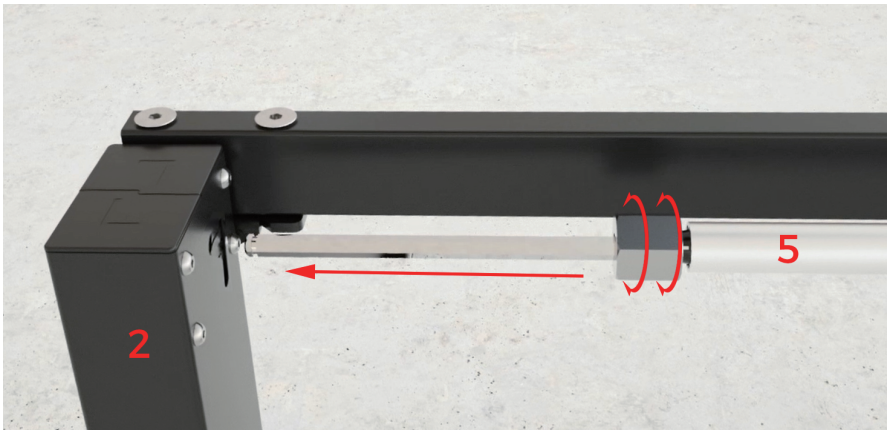

6

Rotate and insert the transmission rod to (3) and use 2.5 x 2.5 allen key (A) to tighten it.

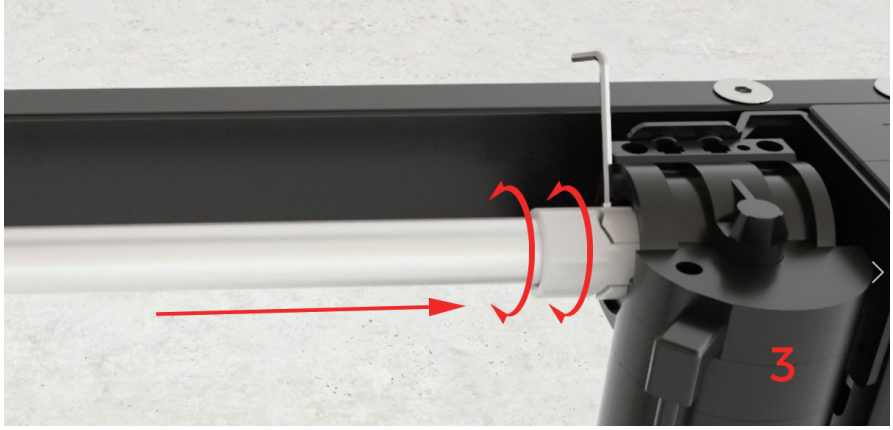

ERGOPIXEL

7

Connect side bracket (6) with column (3). Use the 5x5 allen key (A) to tighten the screws (C).

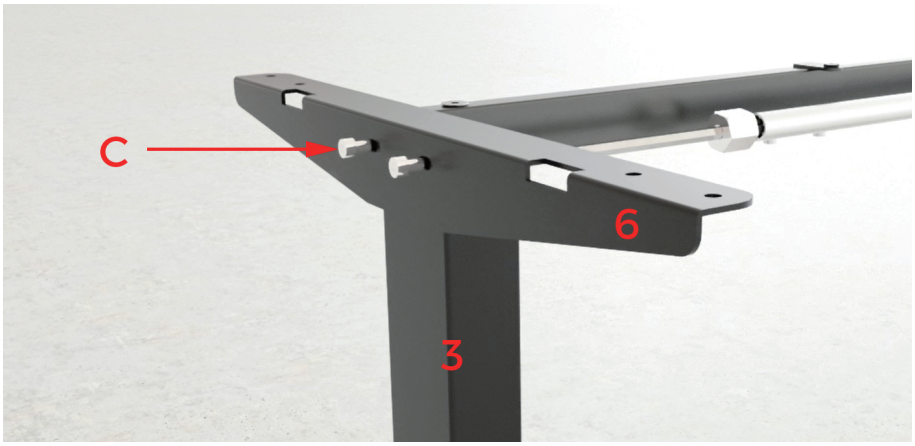

8

Connect side bracket (6) with column (2). Use the 5x5 allen key (A) to tighten the screws (C).

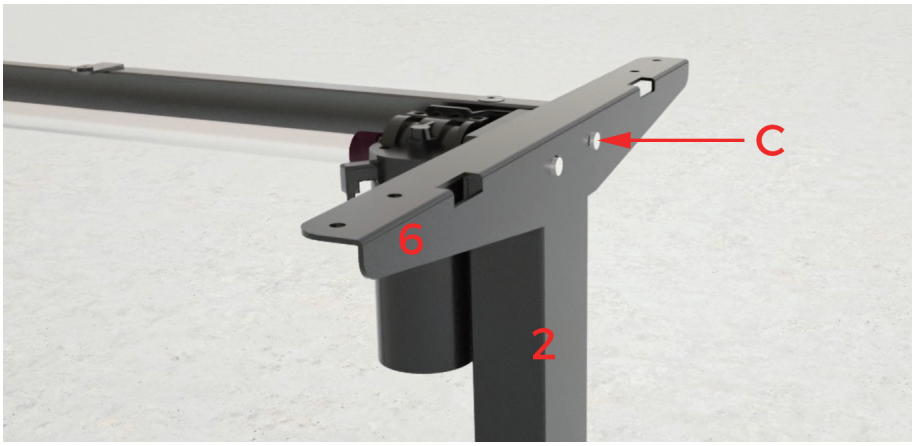

9

Attach the desktop with screws (D), the distance between supporting beam (4).
Both sides shall not be greater than 200mm.

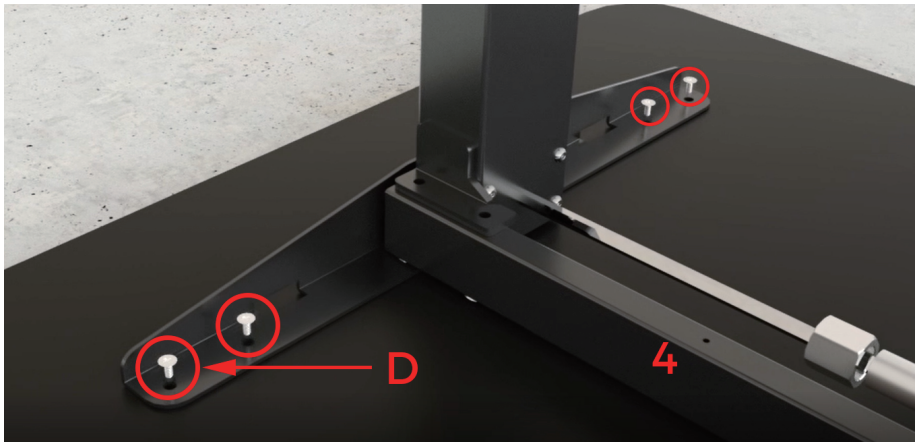

ERGOPIXEL

10

Install the control box (8) with screws (D) as shown in the image below.

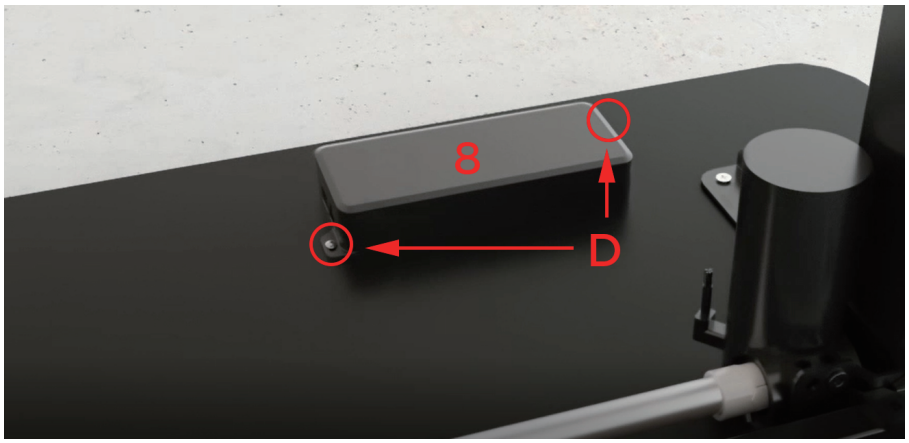

11

Install the handset (11) with handle screws (12) as shown in the image below.

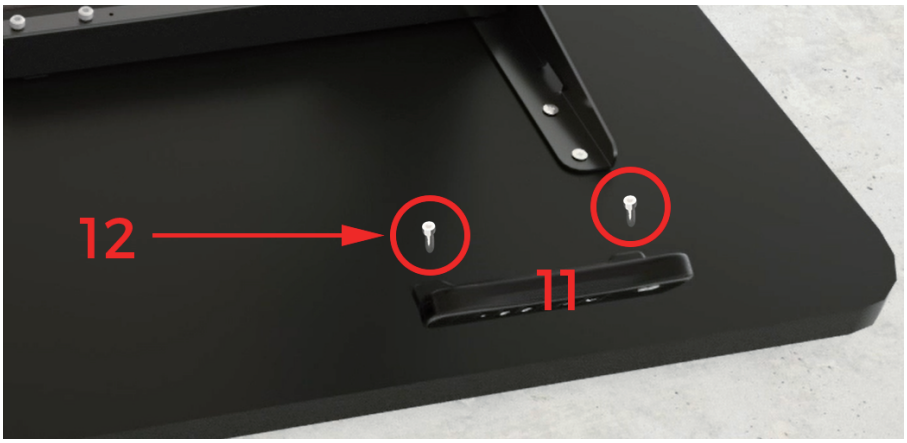

12

Tighten all screws on transmission rod (5) and attach the desktop with screws (D), the distance between supporting beam (4).

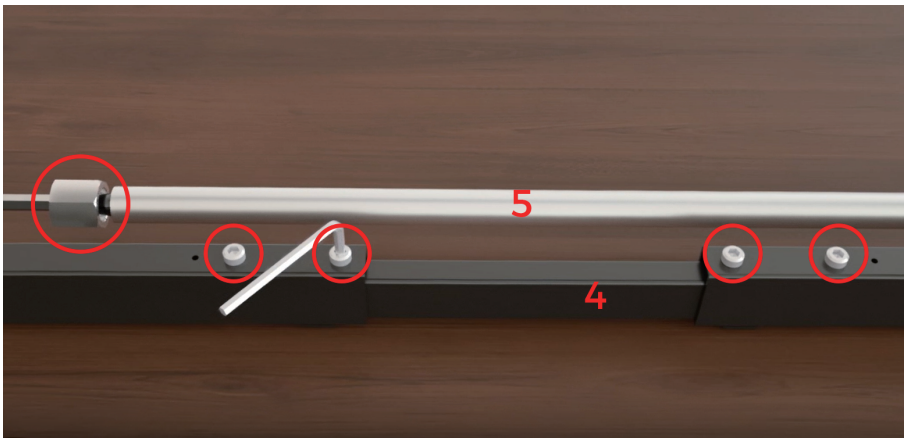

13

Install the baffle (7) on both side of the supporting beam (4) with the screws (B), and then use 2.5*2.5 allen key (A) to tighten.

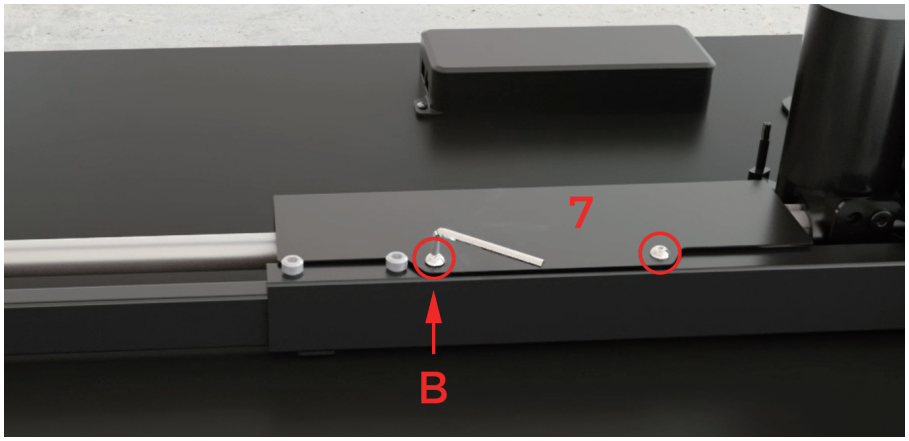

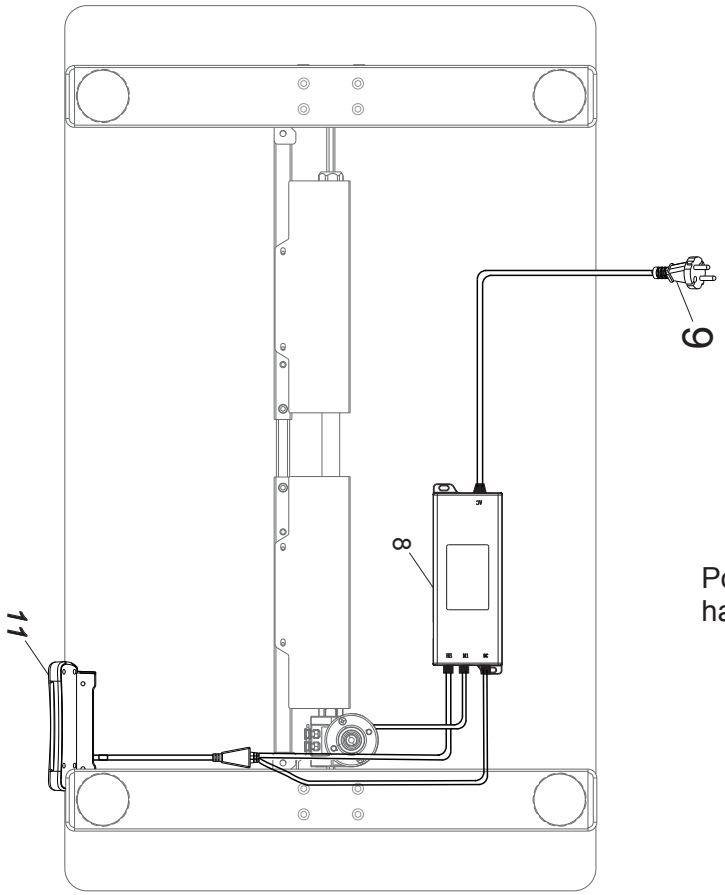

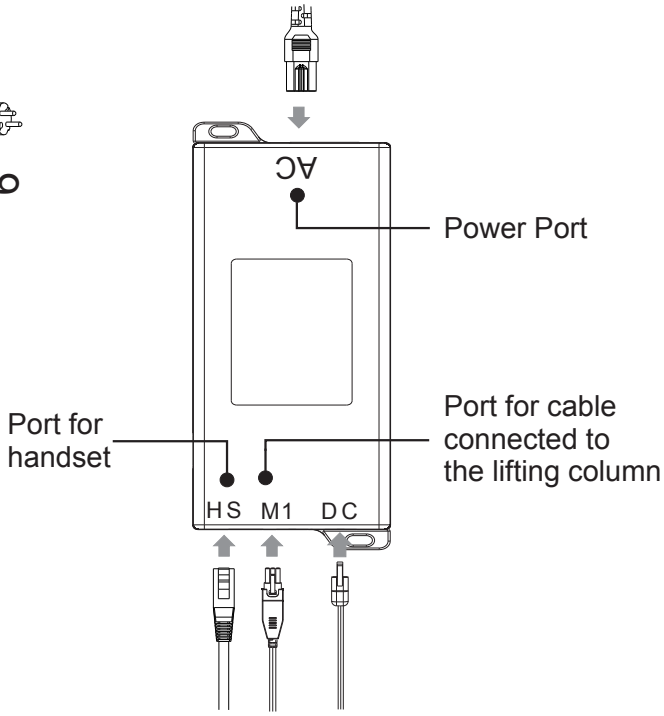

Assembly Video: